

# FlexCore Frame Assembly

## FlexCore Laboratory Solutions


In business since 1943, ICI is a recognized leader in the laboratory furniture industry; and now, our FlexCore adaptable furniture system allows almost limitless possibilities. From traditional modular casework, to docking mobile instrument carts, FlexCore can provide a unique working environment tailored to individual needs. With durable, rugged construction designed specifically for today's industrial, research and university laboratories - and, at an affordable price point - FlexCore is an exciting alternative. Perhaps more importantly, FlexCore is designed to easily connect to almost all competitor units, at a more affordable price.

FlexCore instrument carts can be assembled from a wide array of components to create mobile benches, bookcases, computer support or docking desk environments. Services can be easily managed through simple access panels, while not interrupting operations.


FlexCore is a spine and core based system, utilizing the benefits of true service management while allowing virtually unlimited choices for personal layouts. The ICI solution is really a flex-light approach, making the ability to reconfigure the laboratory affordable.

### Features include:

- 14 gauge dual channel uprights
- Integral cable chase-ways
- Sized from 24" - 72" in 6" increments
- Easily removed covers
- Inner and outer shelving
- Depths in 3.25", 6", 8.75" and 12"
- Built-in pipe supports
- Static service panel allows desk height accessibility for both electrical and data
- Knock-down design reduces costly freight & eases job site handling
- Made in the USA

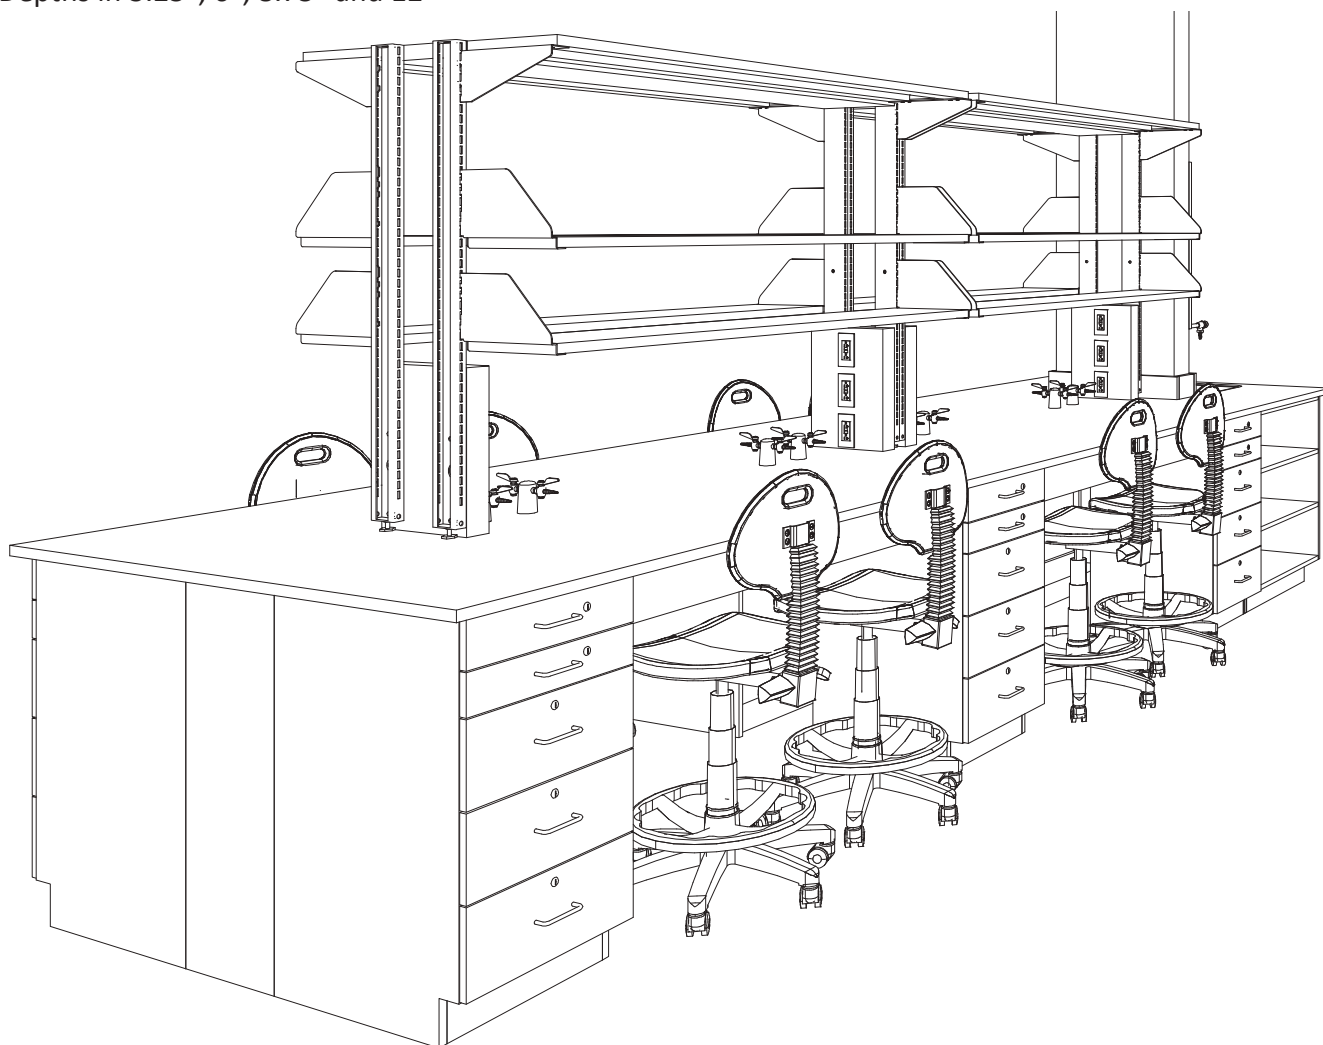


# FlexCore Frame Assembly

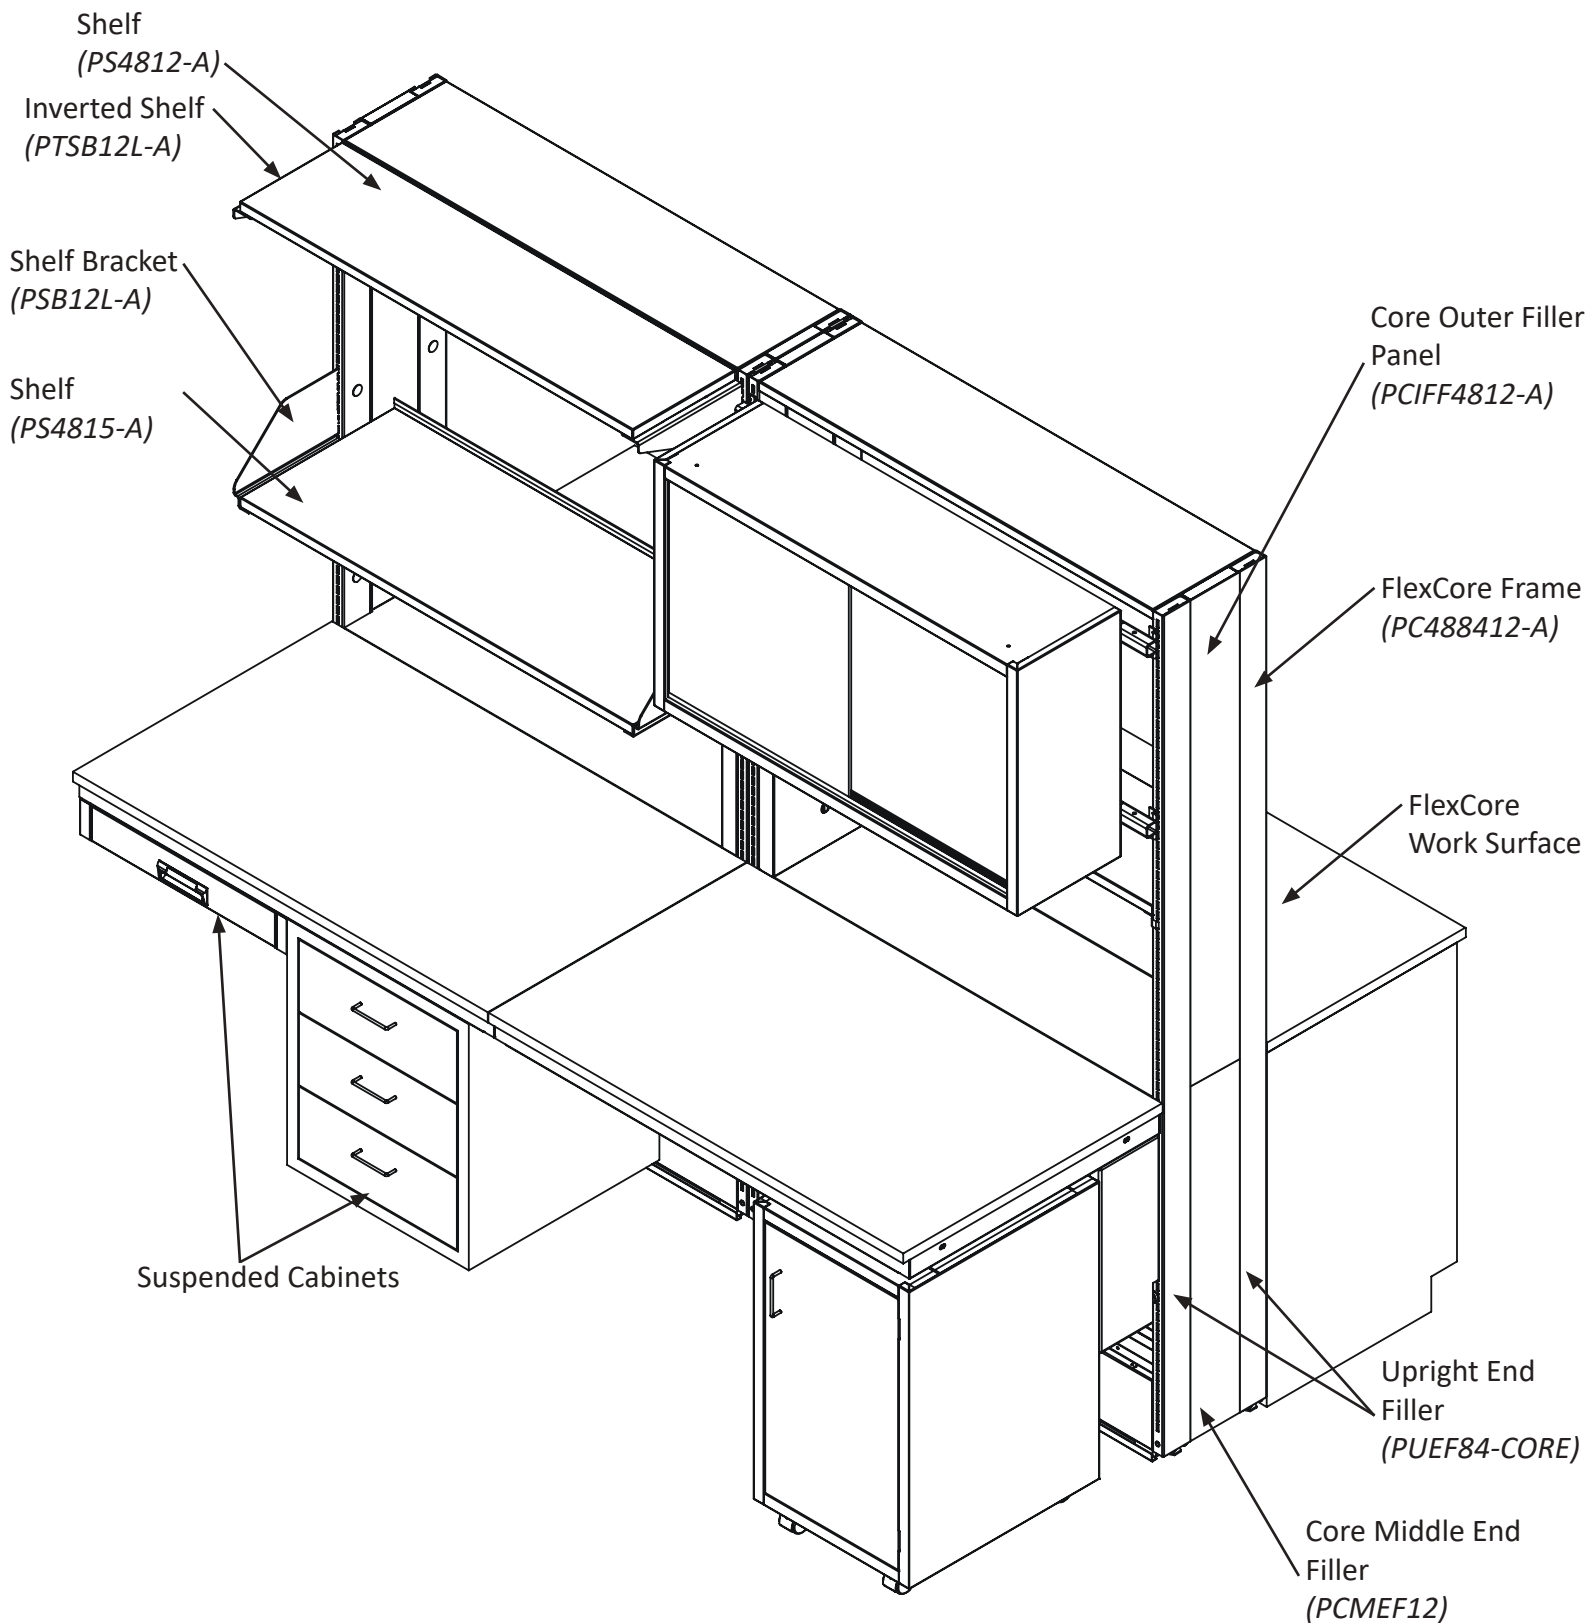

# FlexCore Frame


## 36" Tall FlexCore Frame - 3.25" Deep

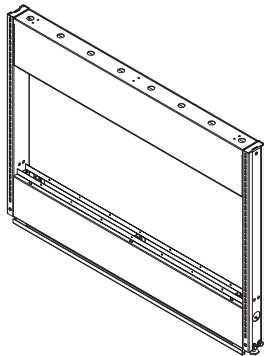

- 36" tall x 3.25" deep frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.    | Width |
|-------------|-------|
| PC2436325-A | 24"   |
| PC3036325-A | 30"   |
| PC3636325-A | 36"   |
| PC4236325-A | 42"   |
| PC4836325-A | 48"   |
| PC5436325-A | 54"   |
| PC6036325-A | 60"   |
| PC6636325-A | 66"   |
| PC7236325-A | 72"   |


## 36" Tall FlexCore Frame - 6" Deep

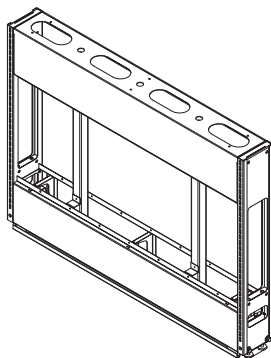

- 36" tall x 6" deep frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.   | Width |
|------------|-------|
| PC243606-A | 24"   |
| PC303606-A | 30"   |
| PC363606-A | 36"   |
| PC423606-A | 42"   |
| PC483606-A | 48"   |
| PC543606-A | 54"   |
| PC603606-A | 60"   |
| PC663606-A | 66"   |
| PC723606-A | 72"   |


## 36" Tall FlexCore Frame - 12" Deep

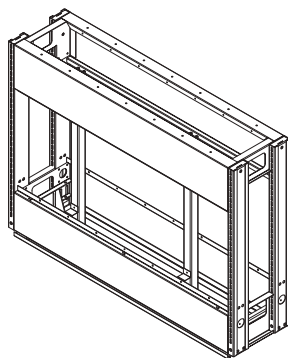

- 36" tall x 12" deep frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.   | Width |
|------------|-------|
| PC243612-A | 24"   |
| PC303612-A | 30"   |
| PC363612-A | 36"   |
| PC423612-A | 42"   |
| PC483612-A | 48"   |
| PC543612-A | 54"   |
| PC603612-A | 60"   |
| PC663612-A | 66"   |
| PC723612-A | 72"   |


## 48" Tall FlexCore Frame - 3.25" Deep

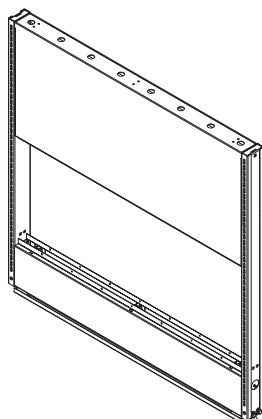

- 48" tall x 3.25" deep frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.    | Width |
|-------------|-------|
| PC2448325-A | 24"   |
| PC3048325-A | 30"   |
| PC3648325-A | 36"   |
| PC4248325-A | 42"   |
| PC4848325-A | 48"   |
| PC5448325-A | 54"   |
| PC6048325-A | 60"   |
| PC6648325-A | 66"   |
| PC7248325-A | 72"   |


## 48" Tall FlexCore Frame - 6" Deep

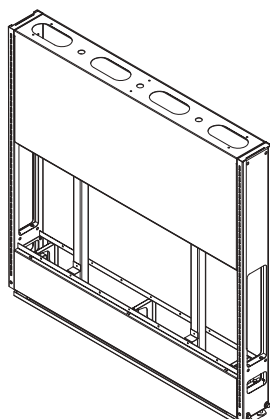

- 48" tall x 6" deep frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.   | Width |
|------------|-------|
| PC244806-A | 24"   |
| PC304806-A | 30"   |
| PC364806-A | 36"   |
| PC424806-A | 42"   |
| PC484806-A | 48"   |
| PC544806-A | 54"   |
| PC604806-A | 60"   |
| PC664806-A | 66"   |
| PC724806-A | 72"   |

## 48" Tall FlexCore Frame - 12" Deep

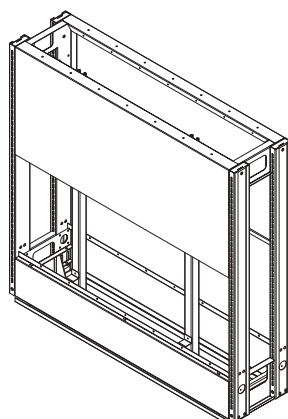


- 48" tall x 12" deep frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.   | Width |
|------------|-------|
| PC244812-A | 24"   |
| PC304812-A | 30"   |
| PC364812-A | 36"   |
| PC424812-A | 42"   |
| PC484812-A | 48"   |
| PC544812-A | 54"   |
| PC604812-A | 60"   |
| PC664812-A | 66"   |
| PC724812-A | 72"   |

# FlexCore Frame


## 84" Tall FlexCore Frame - 3.25" Deep - 36" Tall Ledge Support

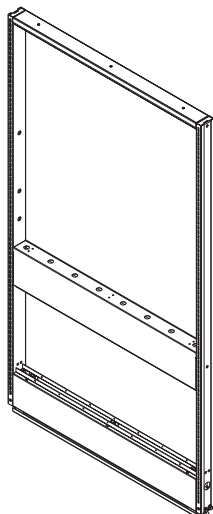

- 84" tall x 3.25" deep frame
- Ledge support set at 36" high
- Replace "P" with a "S" for Stainless Steel

| Cat. No.    | Width |
|-------------|-------|
| PC2484325-A | 24"   |
| PC3084325-A | 30"   |
| PC3684325-A | 36"   |
| PC4284325-A | 42"   |
| PC4884325-A | 48"   |
| PC5484325-A | 54"   |
| PC6084325-A | 60"   |
| PC6684325-A | 66"   |
| PC7284325-A | 72"   |


## 84" Tall FlexCore Frame - 6" Deep - 36" Tall Ledge Support

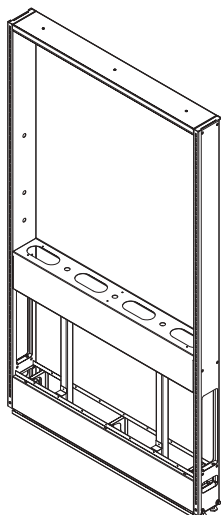

- 84" tall x 6" deep frame
- Ledge support set at 36" high
- Replace "P" with a "S" for Stainless Steel
- Maximum load rating of 2,820 lbs., evenly balanced on both sides

| Cat. No.   | Width |
|------------|-------|
| PC248406-A | 24"   |
| PC308406-A | 30"   |
| PC368406-A | 36"   |
| PC428406-A | 42"   |
| PC488406-A | 48"   |
| PC548406-A | 54"   |
| PC608406-A | 60"   |
| PC668406-A | 66"   |
| PC728406-A | 72"   |


## 84" Tall FlexCore Frame - 12" Deep - 36" Tall Ledge Support

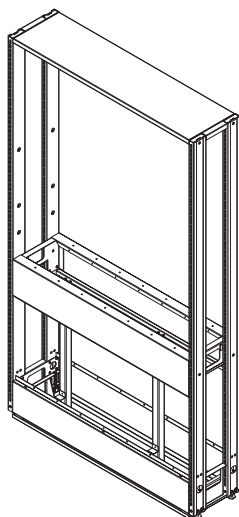

- 84" tall x 12" deep frame
- Ledge support set at 36" high
- Replace "P" with a "S" for Stainless Steel
- Maximum load rating of 2,820 lbs., evenly balanced on both sides

| Cat. No.   | Width |
|------------|-------|
| PC248412-A | 24"   |
| PC308412-A | 30"   |
| PC368412-A | 36"   |
| PC428412-A | 42"   |
| PC488412-A | 48"   |
| PC548412-A | 54"   |
| PC608412-A | 60"   |
| PC668412-A | 66"   |
| PC728412-A | 72"   |


## 84" Tall FlexCore Frame - 3.25" Deep - 48" Tall Ledge Support

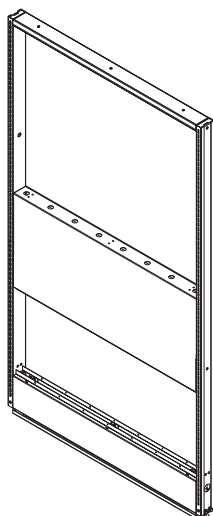

- 84" tall x 3.25" deep frame
- Ledge support set at 48" high
- Replace "P" with a "S" for Stainless Steel

| Cat. No.      | Width |
|---------------|-------|
| PC248448325-A | 24"   |
| PC308448325-A | 30"   |
| PC368448325-A | 36"   |
| PC428448325-A | 42"   |
| PC488448325-A | 48"   |
| PC548448325-A | 54"   |
| PC608448325-A | 60"   |
| PC668448325-A | 66"   |
| PC728448325-A | 72"   |


## 84" Tall FlexCore Frame - 6" Deep - 48" Tall Ledge Support

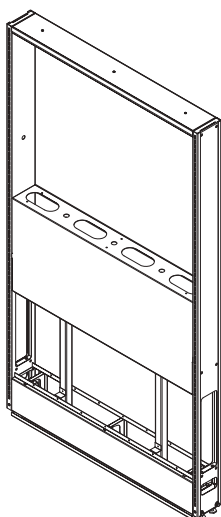

- 84" tall x 6" deep frame
- Ledge support set at 48" high
- Replace "P" with a "S" for Stainless Steel
- Maximum load rating of 2,820 lbs., evenly balanced on both sides

| Cat. No.     | Width |
|--------------|-------|
| PC24844806-A | 24"   |
| PC30844806-A | 30"   |
| PC36844806-A | 36"   |
| PC42844806-A | 42"   |
| PC48844806-A | 48"   |
| PC54844806-A | 54"   |
| PC60844806-A | 60"   |
| PC66844806-A | 66"   |
| PC72844806-A | 72"   |

## 84" Tall FlexCore Frame - 12" Deep - 48" Tall Ledge Support

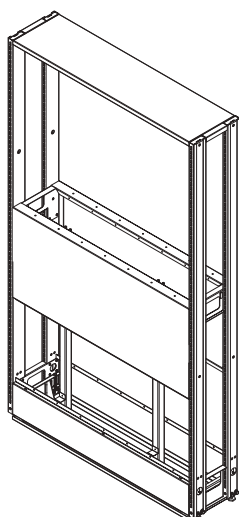


- 84" tall x 12" deep frame
- Ledge support set at 48" high
- Replace "P" with a "S" for Stainless Steel
- Maximum load rating of 2,820 lbs., evenly balanced on both sides

| Cat. No.     | Width |
|--------------|-------|
| PC24844812-A | 24"   |
| PC30844812-A | 30"   |
| PC36844812-A | 36"   |
| PC42844812-A | 42"   |
| PC48844812-A | 48"   |
| PC54844812-A | 54"   |
| PC60844812-A | 60"   |
| PC66844812-A | 66"   |
| PC72844812-A | 72"   |

# FlexCore Frame


## 36" Tall Wall FlexCore Frame - 8.75" Deep

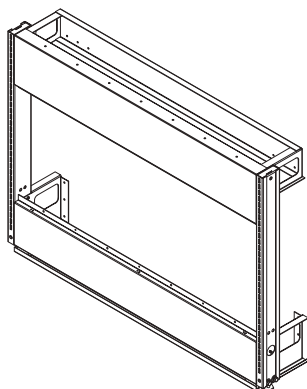

- 36" tall x 8.75" deep wall frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.     | Width |
|--------------|-------|
| PWC2436875-A | 24"   |
| PWC3036875-A | 30"   |
| PWC3636875-A | 36"   |
| PWC4236875-A | 42"   |
| PWC4836875-A | 48"   |
| PWC5436875-A | 54"   |
| PWC6036875-A | 60"   |
| PWC6636875-A | 66"   |
| PWC7236875-A | 72"   |


## 48" Tall Wall FlexCore Frame - 8.75" Deep

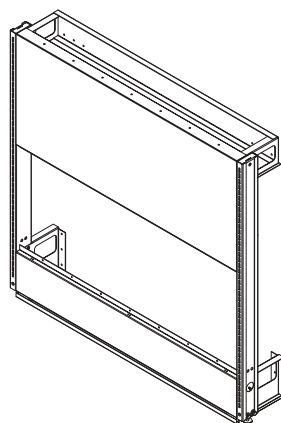

- 48" tall x 8.75" deep wall frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.     | Width |
|--------------|-------|
| PWC2448875-A | 24"   |
| PWC3048875-A | 30"   |
| PWC3648875-A | 36"   |
| PWC4248875-A | 42"   |
| PWC4848875-A | 48"   |
| PWC5448875-A | 54"   |
| PWC6048875-A | 60"   |
| PWC6648875-A | 66"   |
| PWC7248875-A | 72"   |


## 84" Tall Wall FlexCore Frame - 8.75" Deep - 36" Tall Ledge Support

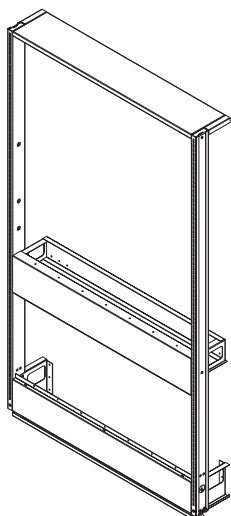

- 84" tall x 8.75" deep wall frame
- Replace "P" with and "S" for Stainless Steel
- Maximum load rating of 1,680 lbs.

| Cat. No.     | Width |
|--------------|-------|
| PWC2484875-A | 24"   |
| PWC3084875-A | 30"   |
| PWC3684875-A | 36"   |
| PWC4284875-A | 42"   |
| PWC4884875-A | 48"   |
| PWC5484875-A | 54"   |
| PWC6084875-A | 60"   |
| PWC6684875-A | 66"   |
| PWC7284875-A | 72"   |

## 84" Tall Wall FlexCore Frame - 8.75" Deep - 48" Tall Ledge Support

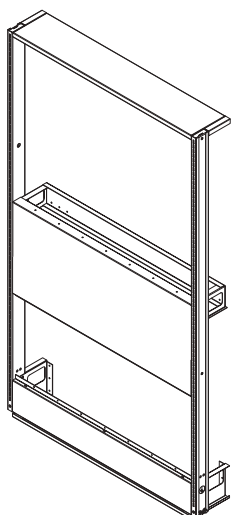


- 84" tall x 8.75" deep wall frame
- Replace "P" with and "S" for Stainless Steel
- Maximum load rating of 1,680 lbs.

| Cat. No.       | Width |
|----------------|-------|
| PWC248448875-A | 24"   |
| PWC308448875-A | 30"   |
| PWC368448875-A | 36"   |
| PWC428448875-A | 42"   |
| PWC488448875-A | 48"   |
| PWC548448875-A | 54"   |
| PWC608448875-A | 60"   |
| PWC668448875-A | 66"   |
| PWC728448875-A | 72"   |

# FlexCore Frame


## 48" Tall Bench Top FlexCore Frame - 6" Deep

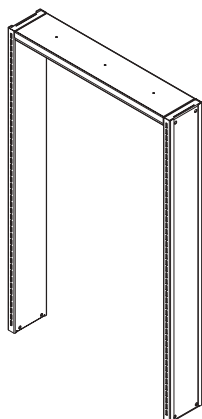

- 48" tall x 6" deep bench top frame
- Replace "P" with a "S" for Stainless Steel
- Maximum load rating of 900 lbs., evenly balanced on both sides

| Cat. No.    | Width |
|-------------|-------|
| PCB244806-A | 24"   |
| PCB304806-A | 30"   |
| PCB364806-A | 36"   |
| PCB424806-A | 42"   |
| PCB484806-A | 48"   |
| PCB544806-A | 54"   |
| PCB604806-A | 60"   |
| PCB664806-A | 66"   |
| PCB724806-A | 72"   |


## 48" Tall Bench Top FlexCore Frame - 12" Deep

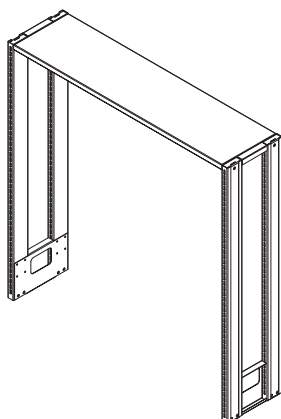

- 48" tall x 12" deep bench top frame
- Replace "P" with a "S" for Stainless Steel
- Maximum load rating of 1,080 lbs., evenly balanced on both sides

| Cat. No.    | Width |
|-------------|-------|
| PCB244812-A | 24"   |
| PCB304812-A | 30"   |
| PCB364812-A | 36"   |
| PCB424812-A | 42"   |
| PCB484812-A | 48"   |
| PCB544812-A | 54"   |
| PCB604812-A | 60"   |
| PCB664812-A | 66"   |
| PCB724812-A | 72"   |

## 48" Tall Bench Top Wall FlexCore Frame - 8.75" Deep

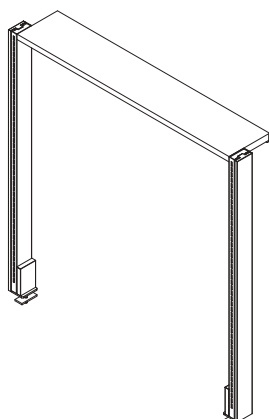

- 48" tall x 8.75" deep bench top frame
- Replace "P" with a "S" for Stainless Steel

| Cat. No.     | Width |
|--------------|-------|
| PCB2448875-A | 24"   |
| PCB3048875-A | 30"   |
| PCB3648875-A | 36"   |
| PCB4248875-A | 42"   |
| PCB4848875-A | 48"   |
| PCB5448875-A | 54"   |
| PCB6048875-A | 60"   |
| PCB6648875-A | 66"   |
| PCB7248875-A | 72"   |